HAND PALLET TRUCK BH

BELET Holding, Kostelní nám. 3, 431 91 Vejprty, Czech Republic
tel.: +420 474 386 100, +420 474 386 310, fax: +420 474 386 194, +420 474 385 225
e-mail: beletholding@belet.cz

Belet Holding

belet® MANIPULAČNÍ TECHNIKA




HAND PALLET TRUCK


Hydraulic:

Galvanized housing. Sturdy construction with hard chromium plated piston and overload protection. Lowering valve allows a controlled lowering of load. One valve cartridge as a single item, instead of many individual parts, easy service.

Hydraulika:

Galvanizované těleso hydrauliky, pevná kompaktní hydraulicky uzavřená konstrukce s chromovaným pístem a bezpečnostním ventilem proti přetížení. Ventil zdvihu reguluje současně rychlost klesání nákladu, jednoduchý servis.

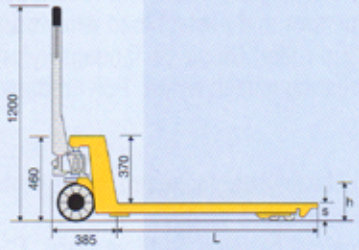





tandem wheel (entry and exit rollers)



hoisting jack

Type/Item / Typ/Parametry	BH2T	BH2,5T	BH3T
Total lift height (h) / Max. výška vidlice	190 mm, 200 mm		
Lowered fork height (s) / Min. výška vidlice	75 mm, 85 mm		
Fork length (L) / Délka vidlic	1150 mm		
Width over the forks (B) / Nabírací šířka vidlic	540 mm, 685 mm		
Fork width (e) / Šířka vidle	160 mm		
Steering wheel / Kolo řídící	⌀200x50 mm		
Load wheel single/tandem / Singl/Tandem kolo pojezdové	⌀74x93 mm/⌀74x70 mm/⌀82x93 mm/⌀80x70 mm		
Capacity / Nosnost	2000 kg	2500 kg	3000 kg
Truck weight / Váha vozíku	79 kg	82 kg	89 kg

- Special fork length are available: 800, 1000, 1100, 1500, 2000 mm.
- Speciální délka vidlic: 800, 1000, 1100, 1500, 2000 mm.

© CDL Design s.r.o., 0467/2004